

Speedlane Slide



The Speedlane Slide, part of the Lifeline series, is a customisable, intuitive speed-gate featuring a unique pulsing light strip. Combining high design with security the Speedlane Slide interacts with those who approach it, managing and guiding authorised users through to the secured areas of buildings.

The Speedlane Slide has been designed to the highest standards, ahead of industry trends:

- Using unique sensors which detect visitors approaching
- Sleep function to save energy
- Pulsing light strips to guide the user
- Intuitive and proven symbols to make it user friendly
- Ergonomic design for customer comfort
- Customisation possibilities in fitting with interior design
- Premium quality materials

Options

- Single lane or multiple lane set-up
- Jump over detection sensors
- Barrier free mode
- Fail secure or fail safe
- External control panel
- Standard or Angel-wing glass






Dimensions and Specifications

Type	A Passage Width (mm)	Capacity / Minute*	# of Door Wings	Disabled Access	Type of Traffic	B Overall Width (mm)	D Door Wing Height (mm)	E Unit Height (mm)	F Unit Length (mm)
Standard	510	25-30	2	x		1134	980	1035	1440
High	510	25-30	2	x		1134	1200-1800	1035	1440
Wide	910	25-30	2			1934	980	1035	1440
High & Wide	910	25-30	2			1934	1200-1800	1035	1440
Angel Wing	510	25-30	2	x		1134	999	1035	1440
Angel Wing Wide	910	25-30	2			1934	997	1035	1440

* Depending on access control system, in one direction

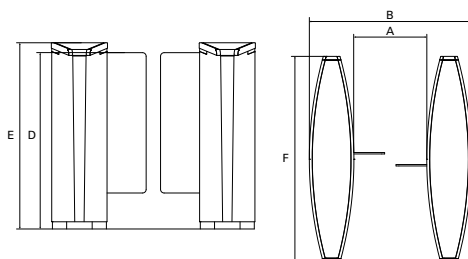

Customisation

The Speedlane Slide is available with a whole array of dimensional and glass choices. Whether it's for a higher security level or disabled access, every combination is possible. The distinctive black glass top instantly gives an air of sleek design, while the finish of the cabinet can be customised to the latest design trends, offering the opportunity to blend-in or stand-out from its surroundings. Whether making a statement, fitting with corporate identity colours or creating a harmonious interior design, the Speedlane Slide makes a design statement in its own right.

Emergency Egress

The Speedlane Slide is equipped with a battery back-up to prevent malfunction if a power failure occurs. If the power is not restored before the battery is exhausted or in case of an emergency the door wings will fully retract into the unit to create a free passage way.

BoonTouch

The BoonTouch is a universal control panel which can be used to operate the Speedlane Slide remotely, from a reception area or security desk. It is able to operate any combination of up to six security access solutions. With a user friendly interface, the BoonTouch allows for the control of individual lanes, multiple lanes and to control an alarm situation.

Technical Specifications

Power Supply: 110-240 VAC, 50/60 Hz

Power Consumption

Operating: 80W

Stationary: 60W

Sleep Mode: 40W

Ambient Temperature: -15°C to +50°C

Weight: 330 kg